

# RO pH Stabilizer Kit

Item #87590

## What comes in the box:

- (1) GS-10CAL/RO Cartridge #25554643
- (1) FT of 3/8 Blue Tube
- (1) Set of 2 Clips


**SERVICE LIFE:** 2,000 gallons (7,570 L) or 1 year.

**WARNING:** Do not use with water that is microbiologically unsafe or of unknown quality.  
The filter must be protected against freezing.  
Install on cold water lines only.  
Water temperature not to exceed 100°F (37.2°C).  
Minimum water pressure 20 psi.

### NOTE:

Activated carbon cartridges will contain a small amount of carbon fines. A new cartridge should be flushed thoroughly before use.


1. Install the large end of the clips on the membrane housing. Then install the cartridge onto the clips.

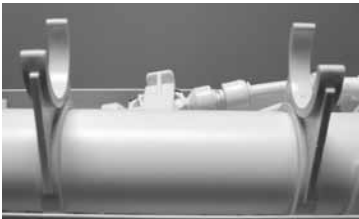

2. Insert the short blue tube supplied with this kit into the connection on the left rear of the RO system. Connect the opposite end of the blue tube into the connector on the cartridge. Arrows on the cartridge should point toward the faucet.




Blue Tube into RO

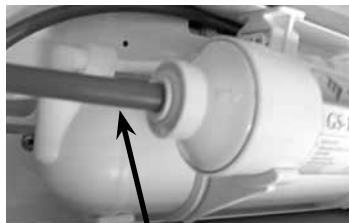

Blue Tube from RO



3. Insert the long blue tube into the opposite end of the cartridge. Attach the other end to the faucet.

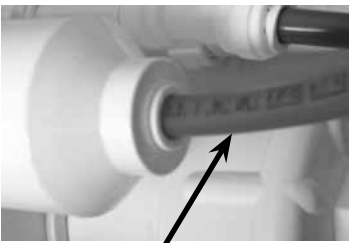

Blue Tube to Faucet

